




Breeze™ Custom

AGCo Trimmer Controlled, Quiet Mode Expansion

HEARING AID FEATURES











- Digital sound processing for clear, comfortable sound
- Output compression limiting
- Four controls provide fitting flexibility
 - Low-cut (green dot)
 - High-cut (black dot)
 - Maximum power output (blue dot)
 - Gain (red dot)
- Controls continuously adjustable in steps for precise adjustment
- Set trimmers counter-clockwise for maximum amplification
- Quiet mode expansion for improved sound quality in quiet environment and reduced circuit noise
- Power management system provides optimized battery life
- Low battery warning
- Contoured matte faceplate provides attractive cosmetics
- Optional telecoil, accessible through push-button switch. Offered with canal, half-shell and full-shell
- Optional dual-microphone directionality for improved signal-to-noise ratio, selectable by push-button. AI – DI = 5.1 dB. Available with canal, half-shell and full-shell
- Manual volume control (with canal, half-shell and full-shell)
- Screw-set volume control (red arrow) standard with CIC, optional with canal, half-shell and full-shell
- Power option on full-shell

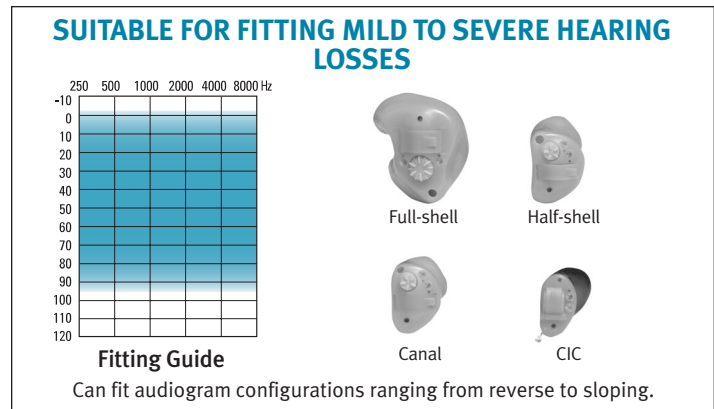

ANSI S3.22-1996 TECHNICAL DATA				
Styles	CIC	Canal Half-shell	Full-shell	Full-shell Power
Frequency Range (Hz)	200-7700	200-8000	200-6200	200-6900
Peak Gain	20-40 dB	35-45 dB	35-55 dB	50-60 dB
Peak Output	112 dB	112 dB	117 dB	123 dB
Reference Test Gain	12-28 dB	27-30 dB	27-35 dB	39 dB
HF Average Gain	12-32 dB	27-37 dB	27-47 dB	44-54 dB
HF Average OSPL ₉₀	105 dB	107 dB	112 dB	116 dB
Typical Battery Life (Zinc Air Premium)	100 h 10A	150-165 h 312	290 h 13	260 h 13
Current Drain at RTP	0.9 mA	0.9-1.0 mA	1.0 mA	1.1 mA
Telephone Magnetic Field Simulator				
HFA SPLITS	N/A	91 dB	90-97 dB	103 dB
STS SPLITS		1-4 dB	2-3 dB	4 dB
Equivalent Input Noise at RTP	19-31 dB	20 dB	20 dB	22 dB
Total Harmonic Distortion at RTP				
500 Hz typical	3%	5%	5%	5%
800 Hz typical	1%	3%	3%	3%
1600 Hz typical	1%	3%	3%	3%
Attack Time	<10 ms	<10 ms	<10 ms	<10 ms
Release Time	100 ms	100 ms	100 ms	100 ms
Compression Ratio	∞:1	∞:1	∞:1	∞:1

MATRIX SELECTIONS			
Full-shell power	Full-shell	Half-shell/Canal	CIC
123/60/02,06,12	117/55/02,06,12	112/45/02, 06, 12	112/40/02, 06, 12
123/55/02,06,12	117/50/02,06,12	112/40/02, 06, 12	112/35/02, 06, 12
123/50/02,06,12	117/45/02,06,12	112/35/02, 06, 12	112/30/02, 06, 12
	117/40/02,06,12		112/25/02, 06, 12
	117/35/02,06,12		112/20/02, 06, 12

BREEZE AGCo CUSTOM DIGITAL ANSI SPECIFICATIONS

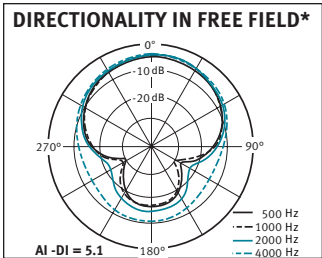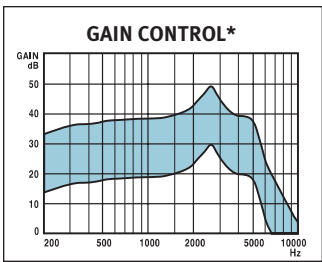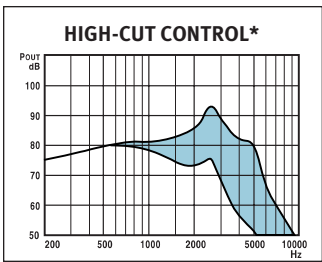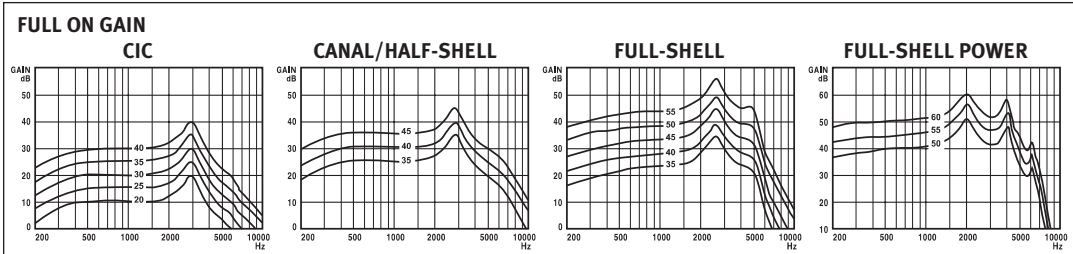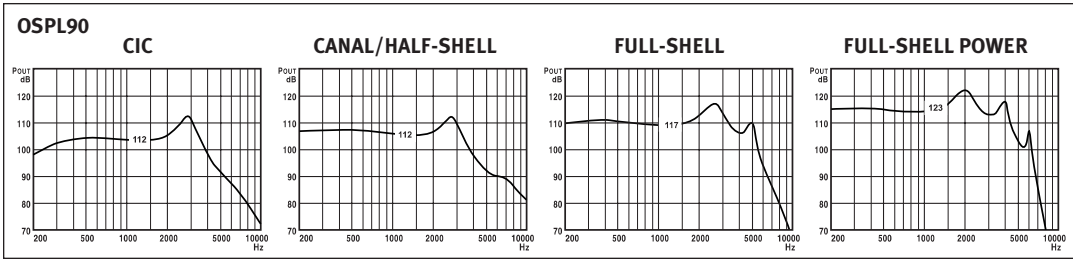

TEST CONDITIONS

RTP-ANSI: Reference Test Position of the Volume Control
 BATTERY: 13 Zinc Air Premium
 SOURCE: Voltage 1.3 V Impedance 6 Ohms
 COUPLER: HA-1
 VENT: Closed at canal end
 Refer to: "Summary of Test Conditions and Limits" for more details.

AID MARKING: Breeze AGCo

COMPLIANCE

Our products are designed to meet all of the limits required when tested in accordance with the applicable standard.

REFERENCES

ASA: Acoustical Society of America, ANSI S3.22-1996
 FDA: Food and Drug Administration, Part 801

We reserve the right to change specification data without notice as improvements are introduced.

This product is manufactured under the protection of U.S. Patent #4349082 & #5204917.

Caution: Hearing aids and batteries can be harmful if swallowed or improperly used.

* The performance was measured based on the Breeze AGCo full-shell (117/50/02)



CORPORATE OFFICE
 Kitchener, Ontario, Canada
 877 492 6244; 519 895 0100

CANADA
 Cambridge, Ontario
 800 265 8255; 519 650 9111

EUROPE
 Oeffingen, Germany
 49 711 658538 0

FRANCE
 Bron, France
 04 26 23 22 00

INTERNATIONAL
 Kitchener, Ontario, Canada
 519 895 0100

NETHERLANDS
 Nieuwegein, The Netherlands
 +31 (0) 30 604 9325

UK
 Warrington, Cheshire, England
 01925 247810

U.S.A.
 Plymouth, Minnesota
 800 888 8882; 763 744 3300

www.unitronhearing.com